

New

HD High Output Alternators

For school buses, emergency equipment, and other high output applications

Date: March 2014
Ref: UNI-High Output
ISO-9001 & TS-16949 Certified

ALT-0270

12V, 275A, J180 Long Hinge Mount
CW rotation, brush type, Max. speed 8,000 RPM



ALT-0271

12V, 275A, Pad Mount
CW rotation, brush type, Max. speed 8,000 RPM




ALT-0320

12V, 325A, J180 Long Hinge Mount
CW Rotation, brush type, Max. speed 8,000 RPM




Output curves

Performance Chart (275A)

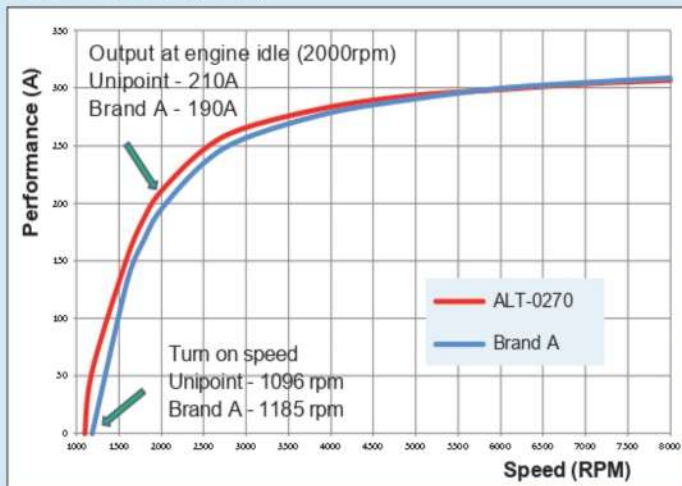

Performance Chart for 275A & 325A

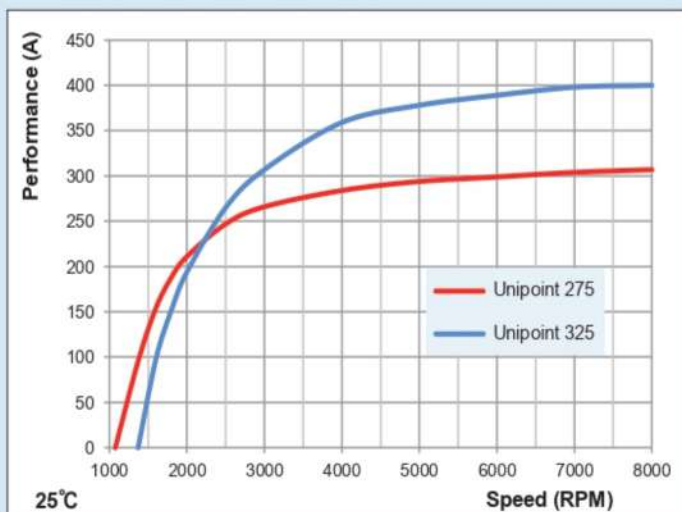

ALT-0321

12V, 325A, Pad Mount
CW Rotation, brush type, Max. speed 8,000 RPM



Featured Benefits

✓ Consolidation of SKUs for lower inventory holding costs

Universal hook up for both ignition and self excite systems

High amp 275 and 325 options to replace 180, 190, 200, 220, 240, 270 & 320 amp OE versions

✓ High temperature rating (125C/257F)

High temperature bearing design

High temperature stator wire resistance

curved fan design for optimal cooling

✓ OE enhanced design for higher power at idle

With remote sense terminal to ensure batteries maintain full charge

High vibration resistance

Enhanced rectifier and regulator design

✓ 1 year warranty